


## Inline Microphone Transformer LL1659

<b>Turns ratio:</b>	10 : 1
<b>Dims:</b>	
<b>Length</b>	35mm
<b>Width</b>	15 mm (max)
<b>Height above PCB</b>	12 mm (max)
<b>Distance between pins</b>	5.08 x 30.48 mm (0.2" x 1.2")

**Side and top views and winding schematics:**

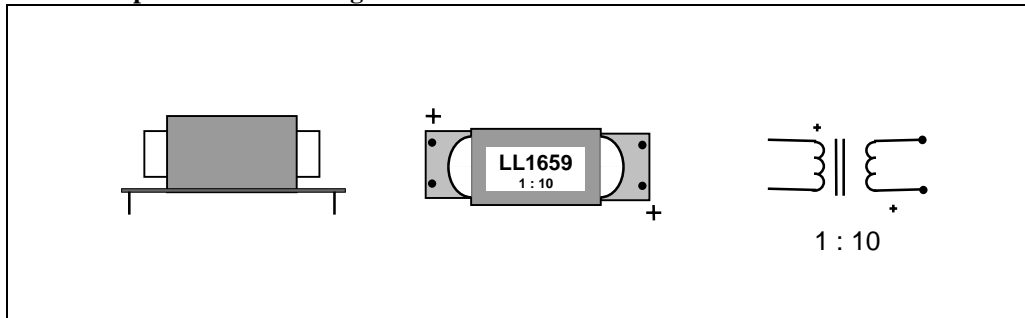

<b>Static resistance of primary:</b>	810 $\Omega$
<b>Static resistance of secondary:</b>	14 $\Omega$
<b>Core:</b>	Amorphous strip core
<b>Max signal level:</b>	approx. 1.2 V / 12 V r.m.s. @ 50 Hz
<b>Isolation between windings / between windings and core:</b>	2 kV/1 kV